

500-x-F Series

Driver Heatsink and Fan Option



2322

The -F fan option suits all 5xxF series dual modulation drivers.

Generic Model table


Model	RF Power	DRIVER DC Supply	FAN DC Supply
5xxF-L-F	>1.6W	+15V	+15V
5xxF-2-F	>2.7W	+22 to +30V	+15V
5xxF-4-F	>4.0W >3.5W	+28V +24V	+15V +15V
5xxF-7-F	>7.0W >6.0W	+28V +24V	+15V +15V

In all cases, the fan DC supply is +15V

A mating connector is provided

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 ISOMET CORP, 10342 Battleview Parkway, Manassas, VA 20109, USA.
 Tel: (703) 321 8301 Fax: (703) 321 8546
 E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
 In-house: RF & Digital design
 Software Development
 OEM manufacture



500-x-F Series


Driver Heatsink and Fan Option



2322

OUTLINE DRAWING

Dim'n: mm

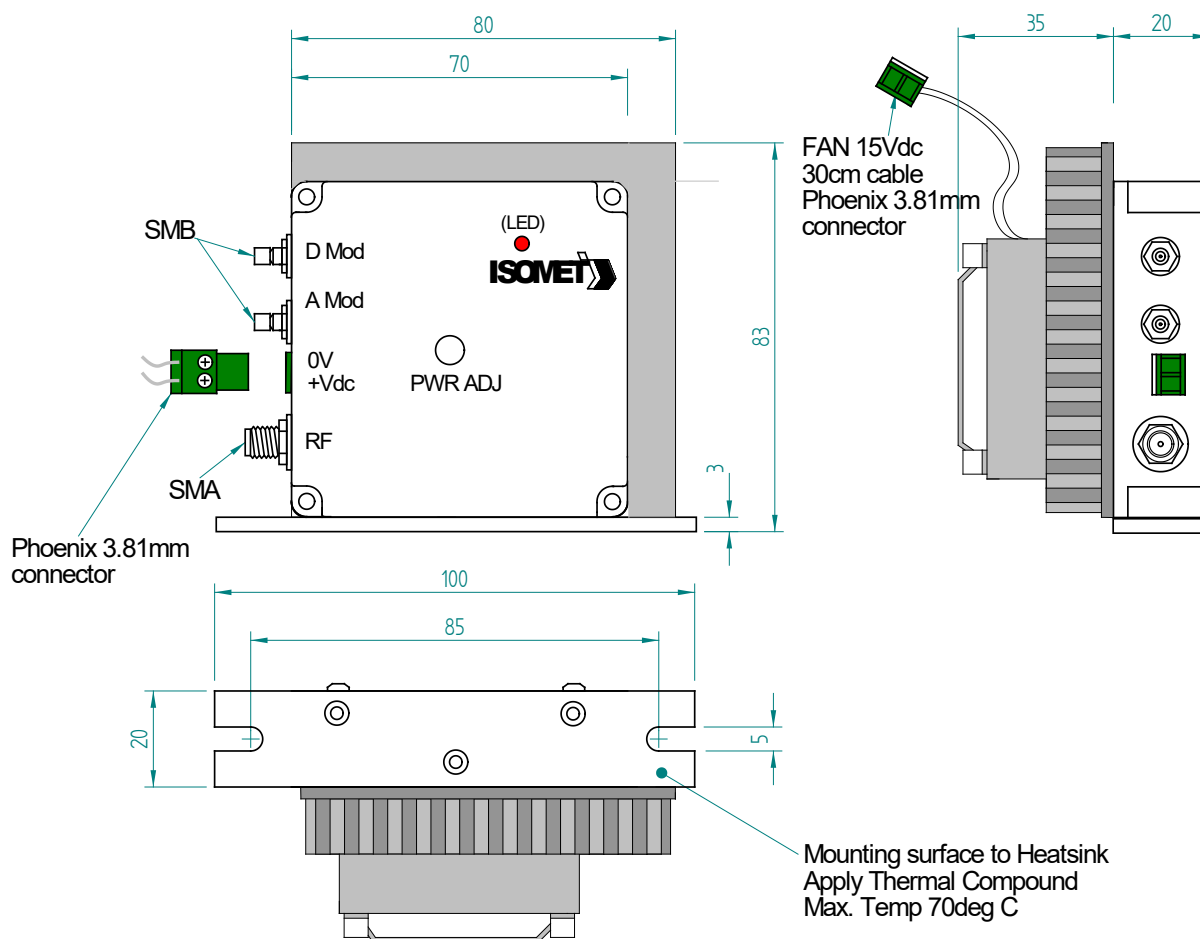

Options:

Option suffix

Heatsink with fan

'-F'

Modulation BIAS adj pot

'-B'

Vertical mount foot

'-R'

0-5V analog modulation

'-V'

0-10V analog modulation

'-X'

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 10342 Battleview Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM

Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: RF & Digital design

Software Development

OEM manufacture