

524F/534F/554-x-175 Series



175MHz Modulator Driver

4821

These dual modulation drivers are compatible with Isomet 175MHz AO modulators and frequency shifters. The design includes a precision crystal oscillator, wideband mixer, high speed RF switch and power amplifier stage. Separate modulation inputs enable simultaneous analog (proportional) and digital (On:Off) amplitude control. Drivers can be factory configured for either or both modulation input controls (see options).

Active modulation	Model	Modulation Input
Digital	524F-	5V logic compatible
Analog	534F-	0 - 1V *, 50ohm
Dual	554F-	both, as above

Efficient heat transfer from the driver is required. The mounting surface must be attached to an external heat sink. The supply to the 5x4F-2 driver is internally regulated and thus will accept a wide DC power input range. The DC input is not internally regulated on version 5x4F-4.

PECIFICATIONS

Output impedance:	50Ω Nominal
Load Mismatch VSWR:	2:1 Max
<u>Analogue Input:</u>	0 - 1V * for 100% depth of modulation
RF output analog mod'n On-Off Ratio:	>40dB
<u>Digital Input:</u>	> 2.7V = ON, < 0.8V = OFF
RF output digital mod'n On-Off Ratio:	>50dB
Frequency Accuracy:	± 25ppm
Frequency Stability:	± 25ppm
DC Power Input:	
5x4F-2	+22 to +30Vdc regulated to ± 1%, < 500mA
5x4F-4	+24/+28Vdc regulated to ± 1%, < 500mA
Temperature Range:	0°C to 60°C ambient, temperature at mounting face must not exceed 60°C.

PERFORMANCE

Model	Centre Frequency	Minimum Rise Time	RF Drive Power	Supply
5x4F-2-175	175MHz	6nsec	>2.2W	+22 to +30V
5x4F-4-175	175MHz	6nsec	>4.0W >3.5W	+28V +24V

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 10342 Battleview Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: RF & Digital design
Software Development
OEM manufacture



524F/534F/554-x-175 Series




4821

175MHz Modulator Driver

OUTLINE DRAWING

Dim'n: mm

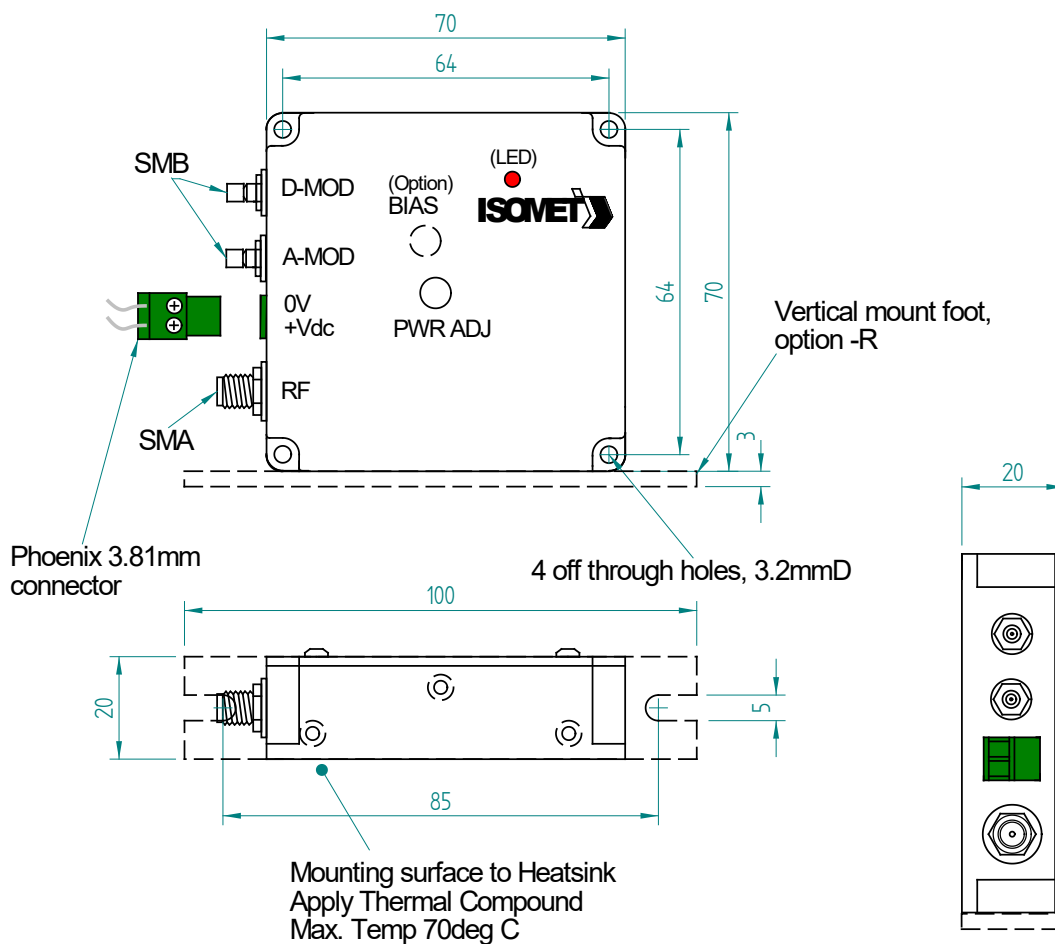

Options:

Add suffix'es (-x)

Modulation BIAS adj pot	'-B'
Heatsink with fan	'-F'
Vertical mount foot	'-R'
0-5V analog modulation	'-V'
0-10V analog modulation	'-X'

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: RF & Digital design
 Software Development
 OEM manufacture