


D110-T100S-4

Acousto-Optic Deflector

Visible wavelengths

The D110-T100S provides high speed laser beam scanning and each model is optimized for a specific operating wavelength in the visible spectrum. The D110-T100S may be operated in raster (linear), random access and vector scanning modes from the same RF drive electronics. The Isomet deflector-driver combination is designed to maintain the Bragg relationship over the specified RF frequency bandwidth. This results in a uniform diffracted beam intensity across the full scan angle.

OUTLINE DRAWING

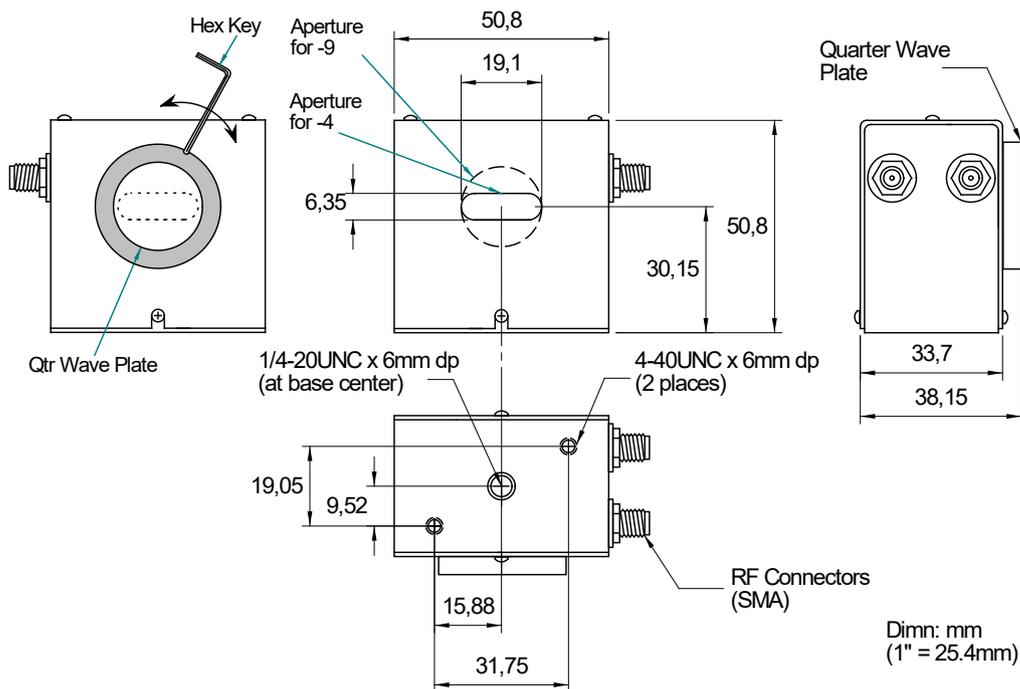


(Formerly model LS110-)

RF DRIVE ELECTRONICS

- 1 off iMS4-L (or -P) quad output synthesizer
- plus -
- 2 off AG0-100T-1-1 amplifiers

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.
 Tel: (703) 321 8301 Fax: (703) 321 8546
 E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
 In-house: Crystal Growth,
 Optical Polishing,
 A/R coating, Vacuum Bonding

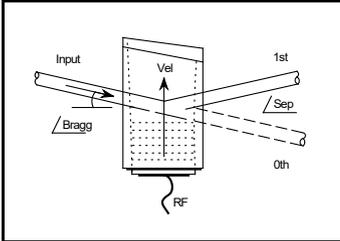

D110-T100S-4

Acousto-Optic Deflector

Visible wavelengths



4421

SPECIFICATIONS

	D110-	T100S-4	T100S-4	T100S-4	T100S-4
Wavelength (specify)**:		488nm	515nm	532nm	633nm
Centre Freq. (nominal)		100MHz	100MHz	100MHz	100MHz
RF Bandwidth Δf:		50MHz	50MHz	50MHz	50MHz
Scan Angle:		2.3°	2.4°	2.5°	2.9°
Separation Angle :		4.5°	4.8°	4.9°	5.9°
Total RF driver power:	MAX average or CW drive power limit = 3W				
	D110-T100S-4	0.85W	1.0W	1.0W	1.2W
Aperture***:		<u>Active Aperture:</u>		<u>Access Time:</u>	
	D110-T100S-4	4mm(H) x 14mm(W)		22.7μs	
Resolution N*:	N = maximum number of <u>resolvable</u> spots (angles), beam width dependent				
	D110-T100S-4	N=1100, 14mm width beam			

Input Laser Polarization:	Linear. (Quarter wave plate included)
Output Laser Polarization:	Circular (Nominal)
Interaction Material:	TeO ₂ (Slow Shear)
Acoustic Velocity:	0.617mm/μs
RF Input Impedance:	50Ω Nominal
Insertion loss:	< 5%
Diffraction Efficiency:	70% across scan (>75% typical)
Optical Power:	10W CW, full aperture

* Theoretical Rayleigh resolution with a uniformly illuminated aperture.
Incremental / non-resolvable spots are limited by the drive frequency resolution.

** Please specify with order. Call for other operating wavelengths.
See models D110-T120S for <488nm.
See models D110-T50S / T70S for NIR.

*** See model D110-T100S-9, for increased aperture height (9mm) but reduced max' resolution, N=750

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.
Tel: (703) 321 8301 Fax: (703) 321 8546
E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding