

762C-x Series RF Driver, (Pulse OFF)



1921

The 762C series are low cost 80MHz Q-switch drivers with integral pulse width control.

Once DC power is applied, the RF power is active and output continuously. The RF is modulated '**Of'f'** for a period defined by an internal monostable. It is triggered on the falling edge of the Modulation input. The pulse width can be specified by the user and is preset at manufacture. Field adjustment is possible.

Contained in these drivers is a crystal oscillator, monostable, mixer, and RF power amplifier stage.

Efficient heat transfer from the driver is required. The mounting base must be attached to an external heat sink not exceeding a temperature of 70°C.

SPECIFICATIONS

Output impedance: 50Ω Nominal Load Mismatch VSWR: 2:1 Max RF On-Off Ratio: >40dB

Frequency: 80.00MHz
Frequency Accuracy: ± 25ppm
Frequency Stability: ± 0.003%

Modulation Input: TTL compatible, trigger on falling edge

(Maximum voltage 5.5V)

Pulse width (PW), RF Off: Preset 2usec

(Full range 0.25 – 4usec)

On:Off Extinction ratio: 40dB minimum

DC Power Input:

762C-L +15Vdc regulated to \pm 1%, < 400mA 762C-4 +24/+28Vdc regulated to \pm 1%, < 500mA 762C-7 +24/+28Vdc regulated to \pm 1%, < 800mA

Temperature Range: 0°C to 60°C ambient, temperature at mounting face must not exceed 60°C.

Mounting Orientation: Any

Dimensions: See Outline, reverse side.

PERFORMANCE

Model	Centre <u>Frequency</u>	Minimum <u>Rise Time</u>	RF Drive <u>Power</u>	Supply
762C-L	80MHz	<10nsec	>1.7 W	+15V
762C-4	80MHz	<10nsec	>3.5 W	+24V
762C-7	80MHz	<10nsec	>6.5 W	+24V

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 10342 Battleview Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: RF & Digital design Software Development OEM manufacture




762C-x Series RF Driver, (Pulse OFF)




1921

OUTLINE DRAWING

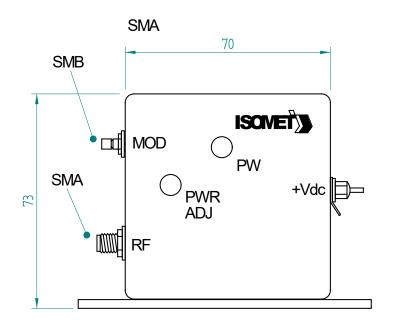



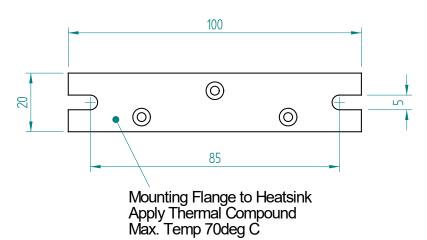

Dim'n: mm

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 10342 Battleview Parkway, Manassas, VA 20109, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured. In-house: RF & Digital design Software Development OEM manufacture